




Lagede paigaldusskeem

UA 50 ja CD 60 profiilidest ilma tulepüsivusnõudeta konstruktsioon 0,40 kN riputitega

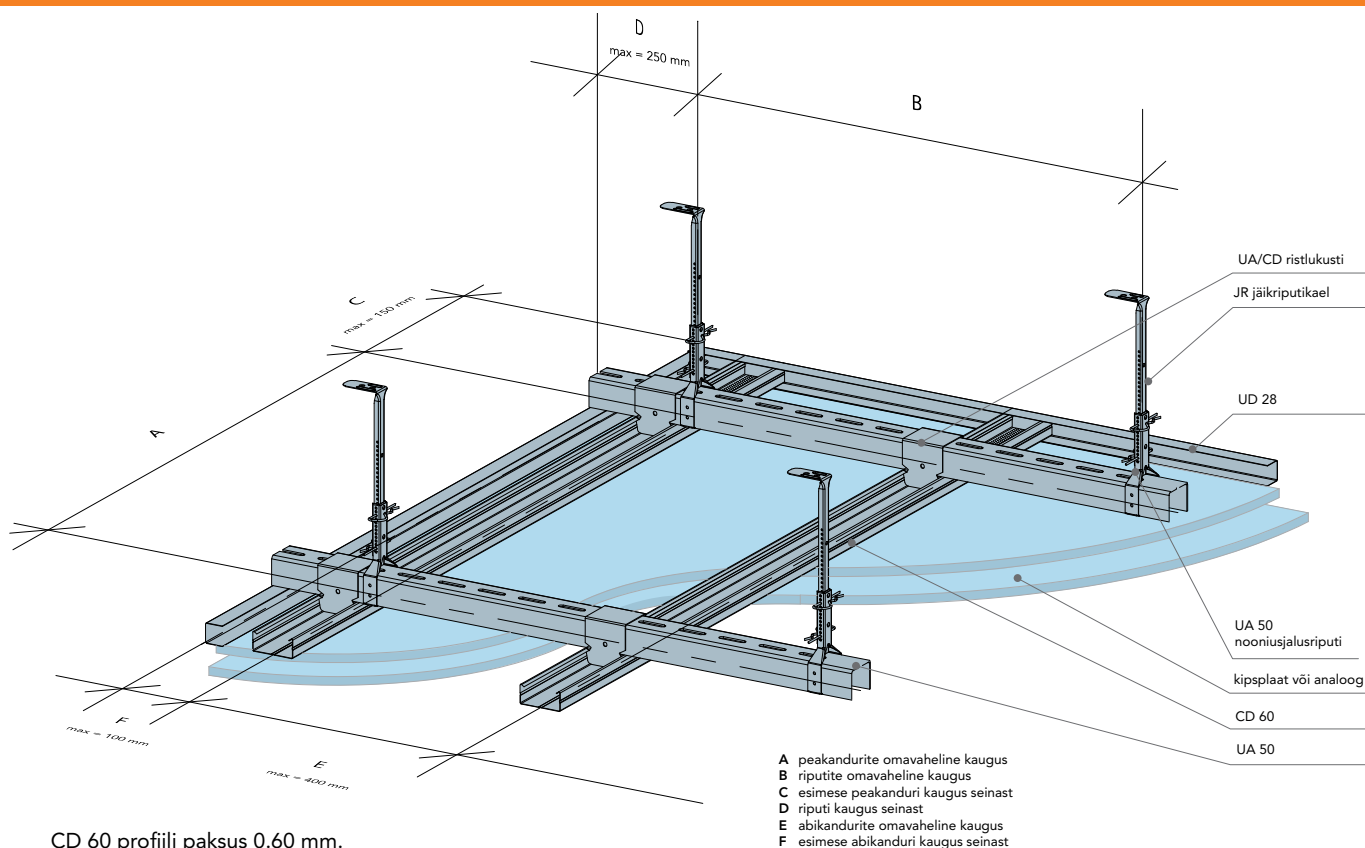

CD 60 profiili paksus 0.60 mm.

Riputite vahe (mm) Mõõt B	UA 50 profiilide teljevahed (mm) lae koormuse kohta*						
	Mõõt A						
	8 kg/m ²	10 kg/m ²	15 kg/m ²	31 kg/m ²	41 kg/m ²	51 kg/m ²	66 kg/m ²
800						950	750
900					1050	850	650
1000					950	800	600
1100				1200	900	700	550
1200				1100	800	650	500
1300				1000	750	600	450
1400				900	700	550	400
1500				850	650	500	400
1600				800	600	500	350
1700				750	550	450	350
1800				700	550	450	350
1900			1200	650	500	400	
2000			1100	550	400		
2100			950	450			
2200		1200	800				
2300		1100	700				
2400	1200	950	650				
2500	1050	850	550				
2600	950	750	500				
2700	850	650					
2800	750	600					
2900	650	550					
3000	600						

*UA 50 teljevahed suuremad kui 1200 mm on võimalikud, kuid tuleb kooskõlastada Profiline'iga.