




# Lagede paigaldusskeem

UA 50 ja CD 60 profiilidest ilma tulepüsivusnõudeta konstruktsioon 0,50 kN riputitega

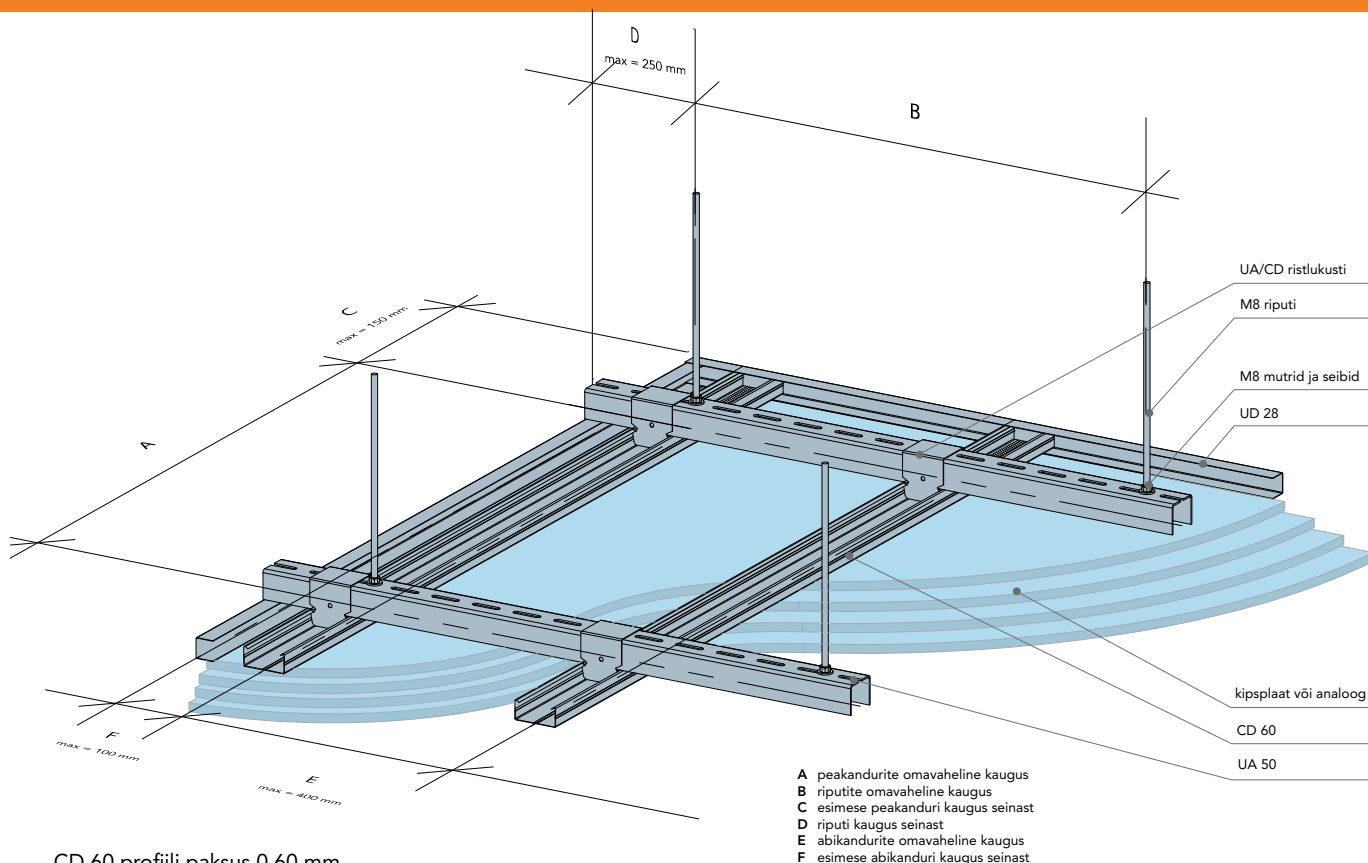

CD 60 profiili paksus 0.60 mm.

Riputite vahe (mm) Mõõt B	UA 50 profiilide teljevahed (mm) lae koormuse kohta*						
	Mõõt A						
	8 kg/m <sup>2</sup>	10 kg/m <sup>2</sup>	15 kg/m <sup>2</sup>	31 kg/m <sup>2</sup>	41 kg/m <sup>2</sup>	51 kg/m <sup>2</sup>	66 kg/m <sup>2</sup>
900							850
1000						950	750
1100						900	700
1200					1050	850	650
1300					950	750	600
1400				1200	900	700	550
1500				1100	850	650	500
1600				1050	800	600	500
1700				900	650	550	400
1800				750	550	450	350
1900			1200	650	500	400	
2000			1100	550	400		
2100			950	450			
2200		1200	800				
2300		1100	700				
2400	1200	950	650				
2500	1050	850	550				
2600	950	750	500				
2700	850	650					
2800	750	600					
2900	650	550					
3000	600						

\*UA 50 teljevahed suuremad kui 1200 mm on võimalikud, kuid tuleb kooskõlastada Profiline'iga.