

CD ceiling profile



CE marked according to EN 14195: 2014

DISCRIPTION:

CD profile is made of hot-dip galvanized steel.

The profiles are bundled with plastic tape and packed on pallets.

PERFORMANCE	
Fire class	A1
Braking strength	270 – 500 MPa
Hazardous substances	NPD
Environment class	C1
Material	Steel DX51D
Coating	Zink 100 Gr/m2


PRODUCT	LENGTH	BUNDLE	PALLET
	mm	pcs	pcs
CD60/27	1137; 2600; 3000; 4000	8	352

USAGE:

CD profiles are used as main and auxiliary carriers in 1-and 2-plane suspended ceiling frames.

If necessary, the profiles can be cut to size with sheet metal scissors or a hacksaw.

Profiles can be stored in a dry and clean environment. Steel scraps are 100% recyclable.

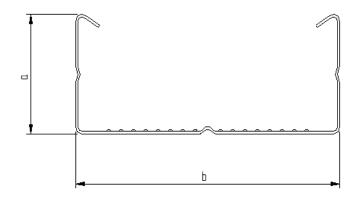

PRODUCT	A	В
CD60/27	27	60