


SKE horizontal profile

37mm

CE marked according to EN 14195 : 2014

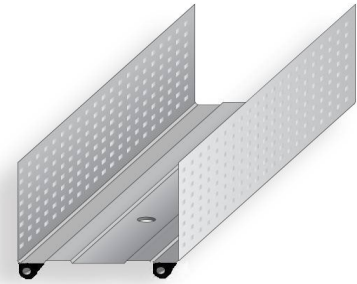

DISCRIPTION:

SKE 37 horizontal profile is made of hot-dip galvanized steel. The profiles have 37 mm high flanges.

The profiles are equipped with two EPDM seals on the bottom, which ensure an effective sound dampening effect.

A roughness is rolled into the edges, which simplifies the installation of screws.

At the bottom of the profile there are evenly spaced holes for screw fasteners.

The profiles are bundled with plastic tape and packed on pallets.

PERFORMANCE

| | |
|----------------------|----------------------------|
| Fire class | A1 |
| Braking strength | 270 – 500 MPa |
| Hazardous substances | NPD |
| Environment class | C1 |
| Material | Steel DX51D |
| Coating | Zink 100 Gr/m ² |

USAGE:

SKE 37 horizontal profile is used as a lower or upper runner together with Profiline AVP acoustic vertical profiles for the construction of a steel frame of partition walls with increased sound absorption requirements.

If necessary, the profiles can be cut to size with sheet metal scissors or a hacksaw.

Profiles can be stored in a dry and clean environment.

Steel scraps are 100% recyclable.

| PRODUCT | LENGTH mm | BUNDLE pc | PALLET pc |
|-----------|--------------|--------------|--------------|
| SKE66/37 | 3000; 3600 | 6 | 96 |
| SKE70/37 | 3000; 3600 | 6 | 96 |
| SKE95/37 | 3000; 3600 | 6 | 72 |
| SKE120/37 | 3000; 3600 | 6 | 72 |

| PRODUCT | A | B | C |
|-----------|----|-----|----|
| SKE66/37 | 37 | 66 | 37 |
| SKE70/37 | 37 | 70 | 37 |
| SKE95/37 | 37 | 95 | 37 |
| SKE120/37 | 37 | 120 | 37 |