


# SKF horizontal profile

## 37mm

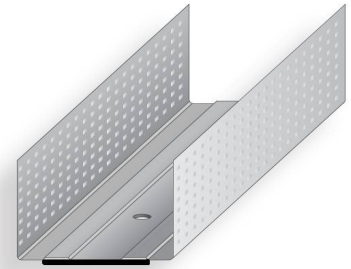

CE marked according to EN 14195 : 2014

### DISCRIPTION:

SKF 37 horizontal profile is made of hot-dip galvanized steel. The profiles have 37 mm high flanges.

At the bottom of the profile is a 4mm polyethylene seal that helps to achieve better contact between the profile and the base.

A roughness is rolled into the edges, which simplifies the installation of screws.

At the bottom of the profile there are evenly spaced holes for screw fasteners.

The profiles are bundled with plastic tape and packed on pallets.

### PERFORMANCE

Fire class	A1
Braking strength	270 – 500 MPa
Hazardous substances	NPD
Environment class	C1
Material	Steel DX51D
Coating	Zink 100 Gr/m <sup>2</sup>

### USAGE:

SKF 37 horizontal profile is used as a lower or upper runner together with Profiline VP or AVP vertical profiles for the construction of the steel framework of partition walls.

If necessary, the profiles can be cut to size with sheet metal scissors or a hacksaw.

Profiles can be stored in a dry and clean environment.

Steel scraps are 100% recyclable.

PRODUCT	LENGTH mm	BUNDLE pc	PALLET pc
SKF66/37	3000; 3600	6	156
SKF70/37	3000; 3600	6	156
SKF95/37	3000; 3600	6	78
SKF120/37	3000; 3600	6	60

PRODUCT	A	B	C
SKF66/37	37	66	37
SKF70/37	37	70	37
SKF95/37	37	95	37
SKF120/37	37	120	37