


SKT horizontal profile

37mm

CE marked according to EN 14195 : 2014

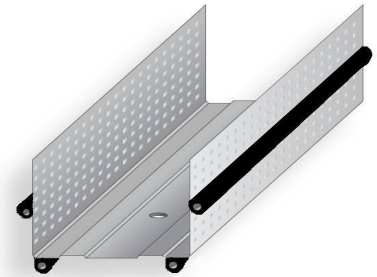

DISCRIPTION:

SKT 37 horizontal profile is made of hot-dip galvanized steel. The profiles have 37mm high flanges.

The profiles are equipped with four EPDM seals on the bottom and flanges, which ensure an effective sound dampening effect.

A roughness is rolled into the edges, which simplifies the installation of screws.

At the bottom of the profile there are evenly spaced holes for screw fasteners.

The profiles are bundled with plastic tape and packed on pallets.

PERFORMANCE

Fire class	A1
Braking strength	270 – 500 MPa
Hazardous substances	NPD
Environment class	C1
Material	Steel DX51D
Coating	Zink 100 Gr/m2

USAGE:

SKT 37 horizontal profile is used as a lower or upper runner together with Profiline AVP acoustic vertical profiles for the construction of a steel frame of partition walls with increased sound absorption requirements.

If necessary, the profiles can be cut to size with sheet metal scissors or a hacksaw.

Profiles can be stored in a dry and clean environment.

Steel scraps are 100% recyclable.

PRODUCT	LENGTH mm	BUNDLE pc	PALLET pc
SKT66/37	3000; 3600	6	96
SKT70/37	3000; 3600	6	96
SKT95/37	3000; 3600	6	72
SKT120/37	3000; 3600	6	72

PRODUCT	A	B	C
SKT66/37	37	66	37
SKT70/37	37	70	37
SKT95/37	37	95	37
SKT120/37	37	120	37