


UD ceiling profile



CE marked according to EN 14195 : 2014

DISCRIPTION:

UD profile is made of hot-dip galvanized steel.

The profiles are bundled with plastic tape and packed on pallets.

PERFORMANCE

Fire class	A1
Braking strength	270 – 500 MPa
Hazardous substances	NPD
Environment class	C1
Material	Steel DX51D
Coating	Zink 100 Gr/m2


PRODUCT	LENGTH mm	BUNDLE pcs	PALLET pcs
UD-28	3000; 4000	10	300

USAGE:

UD profiles are used as edge strips in 1- and 2-plane suspended ceiling frames.

If necessary, the profiles can be cut to size with sheet metal scissors or a hacksaw.

Profiles can be stored in a dry and clean environment. Steel scraps are 100% recyclable.

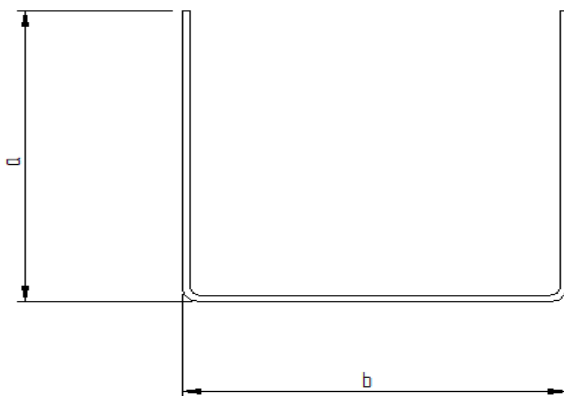

PRODUCT	A	B
UD-28	27	28