


UW vertical profile

58mm

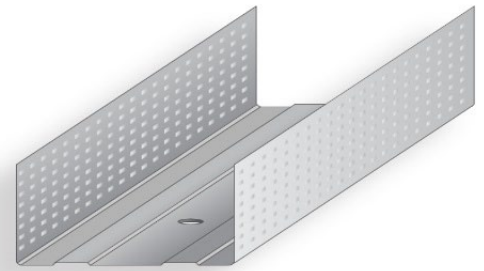

CE marked according to EN 14195 : 2014

DISCRIPTION:

UW 58 horizontal profile is made of hot-dip galvanized steel.

The profiles have 58mm high flanges.

A roughness is rolled into the edges, which simplifies the installation of screws.

At the bottom of the profile there are evenly spaced holes for screw fasteners.

The profiles are bundled with plastic tape and packed on pallets.

PERFORMANCE

Fire class	A1
Braking strength	270 – 500 MPa
Hazardous substances	NPD
Environment class	C1
Material	Steel DX51D
Coating	Zink 100 Gr/m ²

USAGE:


UW 58 horizontal profile is used as a lower or upper runner together with Profiline VP or AVP vertical profiles for the construction of the steel framework of partition walls.

If necessary, the profiles can be cut to size with sheet metal scissors or a hacksaw.

Profiles can be stored in a dry and clean environment.

Steel scraps are 100% recyclable.

PRODUCT	LENGTH mm	BUNDLE pc	PALLET pc
UW50/58	3000; 4000	8	192
UW75/58	3000; 4000	8	160
UW100/58	3000; 4000	6	108

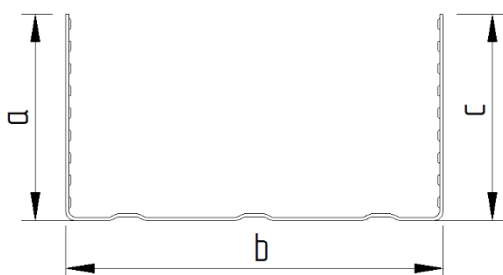

PRODUCT	A	B	C
UW50/58	58	50	58
UW75/58	58	75	58
UW100/58	58	100	58