





*pro*filine

PRODUCT CATALOGUE

Drywall and ceiling systems

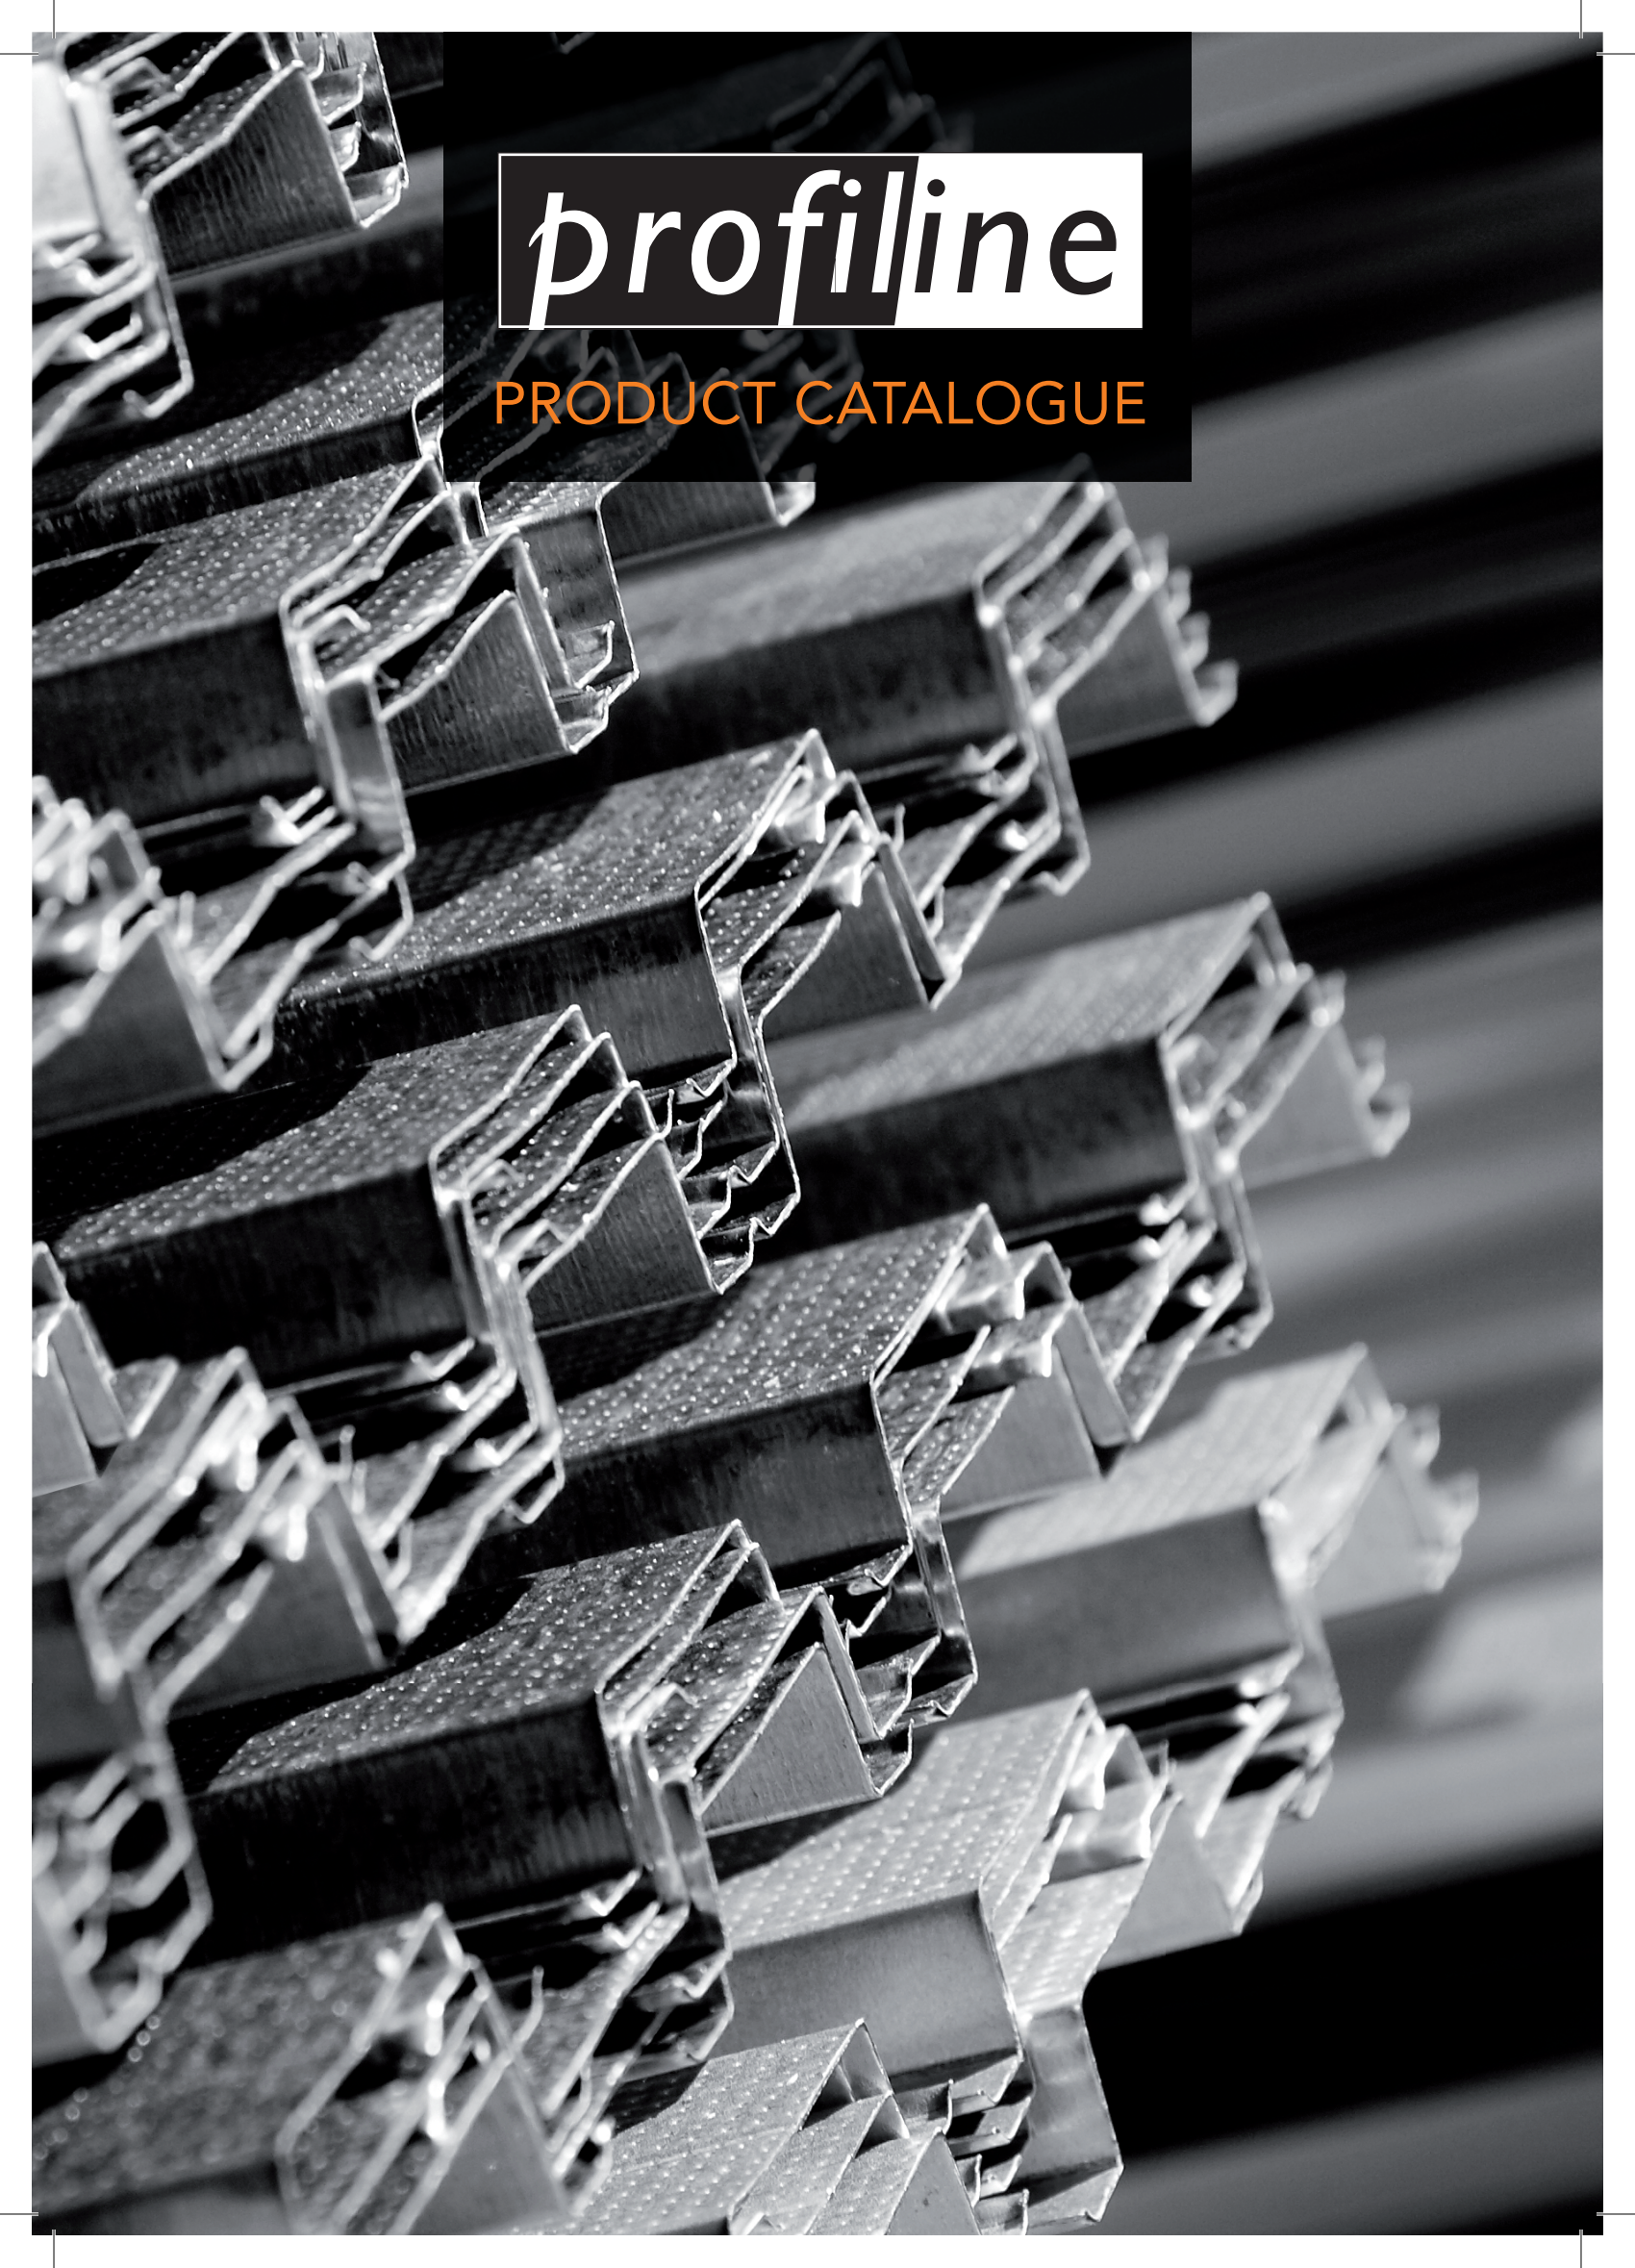


- Profile profiles can be used to build light partitions, single-level and stepped suspended ceilings, cornices and lofts quickly and easily .
- Choosing the right panel and insulation material and ensuring the correct installation, the soundproofing and fire resistance requirements of the structure are guaranteed.

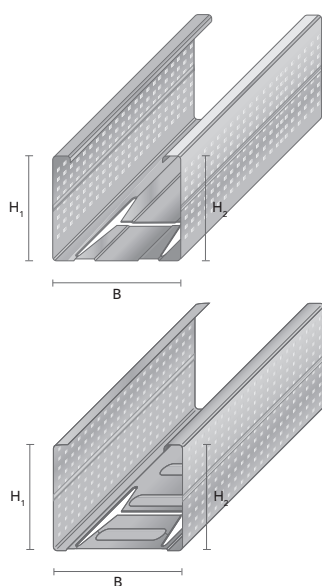


STUD PROFILE

Item	B (mm)	H ₁ ; H ₂ (mm)	Standard length	Package (pcs)	Pallet (pcs)
VP 42/40	42	38/40	2600, 3000, 3300, 4000	8	224
VP 66/40	66	38/40	2600, 3000, 3300, 4000	8	224
VP 70/40	70	38/40	2600, 3000, 3300, 4000	8	224
VP 95/40	95	38/40	2600, 3000, 3300, 4000	8	168
VP 120/40	120	38/40	2600, 3000, 3300, 4000	6	150
CW 50/50	50	48/50	2600, 3000, 3500, 4000	8	288
CW 75/50	75	48/50	2600, 3000, 3500, 4000	8	192
CW 100/50	100	48/50	2600, 3000, 3500, 4000	8	144

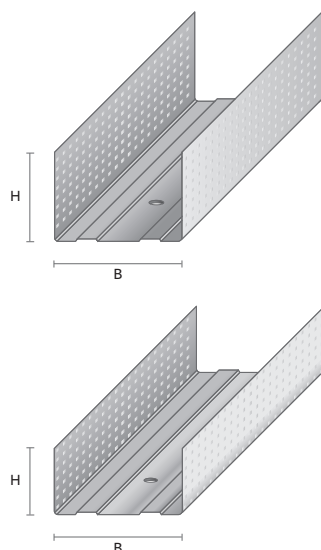


RUNNER PROFILE

Item	B (mm)	H (mm)	Standard length	Package (pcs)	Pallet (pcs)
HP 42/37	42	37	3000	12	240
HP 66/37	66	37	3000	8	192
HP 70/37	70	37	3000	8	192
HP 95/37	95	37	3000	8	144
HP 120/37	120	37	3000	6	120
HP 42/58	42	58	3000	8	192
HP 66/58	66	58	3000	8	160
HP 70/58	70	58	3000	8	160
HP 95/58	95	58	3000	8	120
HP 120/58	120	58	3000	6	90
UW 50/37	50	37	3000, 4000	8	288
UW 75/37	75	37	3000, 4000	8	192
UW 100/37	100	37	3000, 4000	8	144
UW 50/58	50	58	3000, 4000	8	192
UW 75/58	75	58	3000, 4000	8	160
UW 100/58	100	58	3000, 4000	6	108




VP 66/40 ST STUD

Item	B (mm)	H ₁ ; H ₂ (mm)	Standard length	Package (pcs)	Pallet (pcs)
VP 66/40ST	66	38/40	2600, 2720, 3000, 3300, 3600, 4000	8	224



HAT PROFILE


Item	B ₁ ; B ₂ (mm)	H (mm)	Standard length	Package (pcs)	Pallet (pcs)
MP 16	50/86	16	3000	10	200
MP 27	38/78	27	3000	10	200



CD 60 CEILING PROFILE



Item	B (mm)	H (mm)	Standard length	Package (pcs)	Pallet (pcs)
CD 60	60	27	1137, 2600, 3000, 4000	8	352
CD 60 M	60	27	1137, 2600, 3000, 4000	8	352



EDGE PROFILE




Item	B (mm)	H (mm)	Standard length	Package (pcs)	Pallet (pcs)
UD 28	28	27	3000	10	300
UD 28M	28	27	3000	10	300

Acoustic profiles




- Acoustic profiles are used to achieve better sound insulation in new buildings. Acoustic insulation can also be an improvement for existing ceilings, partitions and external walls.
- Specially shaped acoustic vertical profiles and runners with seals are installed to the ceiling and floor and can achieve soundproofing up to 55 dB.

Acoustic profiles for sound insulating walls




ACOUSTIC STUDS

Item	B (mm)	H ₁ ; H ₂ (mm)	Standard length	Package (pcs)	Pallet (pcs)
AVP 66	66	38/40	2600, 2700, 3000, 3300	8	144
AVP 70	70	38/40	2600, 2700, 3000, 3300	8	144
AVP 95	95	38/40	2600, 2700, 3000, 3300	8	120
AVP 120	120	38/40	2600, 2700, 3000, 3300	8	96

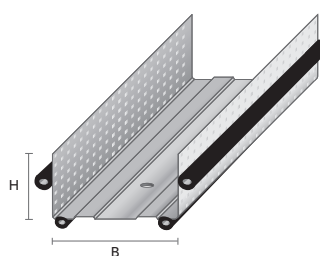

ACOUSTIC RUNNER WITH 4 SEALS

Item	B (mm)	H (mm)	Standard length	Package (pcs)	Pallet (pcs)
SKT 66/37	66	37	3000	6	96
SKT 70/37	70	37	3000	6	96
SKT 95/37	95	37	3000	6	72
SKT 120/37	120	37	3000	6	72
SKT 66/58	66	58	3000	6	144
SKT 70/58	70	58	3000	6	144
SKT 95/58	95	58	3000	6	108
SKT 120/58	120	58	3000	6	54




ACOUSTIC RUNNER WITH 2 SEALS

Item	B (mm)	H (mm)	Standard length	Package (pcs)	Pallet (pcs)
SKE 66/37	66	37	3000	6	96
SKE 70/37	70	37	3000	6	96
SKE 95/37	95	37	3000	6	72
SKE 120/37	120	37	3000	6	72
SKE 66/58	66	58	3000	4	64
SKE 70/58	70	58	3000	4	64
SKE 95/58	95	58	3000	4	48
SKE 120/58	120	58	3000	4	48




RUNNER WITH A SEAL

Item	B (mm)	H (mm)	Standard length	Package (pcs)	Pallet (pcs)
HPT 66/37	66	37	3000	6	156
HPT 70/37	70	37	3000	6	156
HPT 95/37	95	37	3000	6	78
HPT 120/37	120	37	3000	6	60
HPT 66/58	66	58	3000	6	144
HPT 70/58	70	58	3000	6	144
HPT 95/58	95	58	3000	6	108
HPT 120/58	120	58	3000	6	54
UWT 75/37	75	37	3000, 4000	8	192
UWT 100/37	100	37	3000, 4000	8	144
UWT 75/58	75	58	3000, 4000	8	160
UWT 100/58	100	58	3000, 4000	6	108




ACOUSTIC RUNNER VP+

Item	B (mm)	H ₁ ; H ₂ (mm)	Standard length (mm)	Package (pcs)	Pallet (pcs)
VP+ 66/40	66	38/40	2600, 3000, 3300, 4000	8	192
VP+ 70/40	70	38/40	2600, 3000, 3300, 4000	8	168
VP+ 95/40	95	38/40	2600, 3000, 3300, 4000	8	120
VP+ 120/40	120	38/40	2600, 3000, 3300, 4000	8	96




Corner profiles

Corner solutions




CORNER PROFILE

Item	B (mm)	H (mm)	Standard length	Package (pcs)	Pallet (pcs)
L 10/30	10	30	3000	20	400
L 30/30	30	30	3000	20	400
L 30/40	30	40	3000	20	400
L 50/50	50	50	3000	20	400



J-PROFILE


Item	B (mm)	H ₁ ; H ₂ (mm)	Standard length	Package (pcs)	Pallet (pcs)
J 13	14	30/13	3000	50	200
J 16	17	30/13	3000	50	200
J 26	27	30/13	3000	50	200
J 28	28	48/27	3000	8	224



INNER CORNER PROFILE


Item	B (mm)	H (mm)	Standard length	Package (pcs)
SNP 60/60	60	60	3000	10

Non-rectangular corner solutions




PERFORATED CORNER PROFILE

Item	B (mm)	H (mm)	Standard length	Package (pcs)
LP 50/50	50	50	3000	20



PERFORATED STRIP

Item	H (mm)	Standard length
PRR 100	100	10 000



CORNER BEAD

Item	Standard length	Package (pcs)
HS 23/23	2600, 3000	50


Reinforcement sections

- Reinforced profiles are meant for building constructions with high load-bearing capacity or rigidity, e.g. high walls (up to 8 m), door and window openings, fire resistant floors with multiple gypsum plate layers.
- Profiline also provides a variety of fasteners and fixings specially designed for reinforced profiles.



Solutions for high walls and door openings


FR reinforced vertical profiles are extendible and fitted with holes for wire and pipe bushings.



REINFORCED STUD

Material thickness: 1.2 mm


Item	B (mm)	H ₁ ; H ₂ (mm)	Standard length	Package (pcs)
FR 50/50	50	48/50	2600, 3300	4
FR 66/50	66	48/50	2600, 3300	4
FR 70/50	70	48/50	2600, 3300	4
FR 75/50	75	48/50	2600, 3300	4
FR 95/50	95	48/50	2600, 3300	4
FR 100/50	100	48/50	2600, 3300	4
FR 120/50	120	48/50	2600, 3300	4

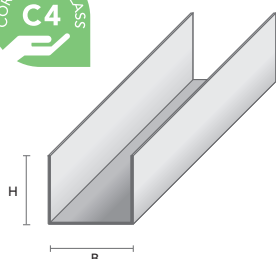

REINFORCED STUD

Material thickness: 1.2 mm

Item	B (mm)	H (mm)	Standard length	Package (pcs)
FSK 50/50	50	50	3000	4
FSK 66/50	66	50	3000	4
FSK 70/50	70	50	3000	4
FSK 75/50	75	50	3000	4
FSK 95/50	95	50	3000	4
FSK 100/50	100	50	3000	4
FSK 120/50	120	50	3000	4



BRACKET FOR REINFORCED PROFILES


Material thickness: 1.2 mm

Item	B (mm)	H (mm)	Package (pcs)
FRK 50	50	110	10
FRK 66	66	110	10
FRK 70	70	110	10
FRK 75	75	110	10
FRK 95	95	110	10
FRK 100	100	110	10
FRK 120	120	110	10

Fasteners and fixings




- A wide range of fasteners and fixings and a flexible system of installation allows for the most complex of projects.
- Profiline's range of fasteners and fixings includes various details for suspension wires, rigid hangers and for installing suspended ceilings straight against the base ceiling.



CORROSION CLASS
C4

CONNECTOR

Item	Package (pcs)
CD 01	100



+

LEVEL CONNECTOR


Item	Package (pcs)
CD 11	100



CORROSION CLASS
C4

ANGLE BRACKET


Item	Package (pcs)
CD 02	100



+

LEVEL CONNECTOR


Item	Package (pcs)
CD 15	24



CORROSION CLASS
C4

CROSS CONNECTOR

Item	Package (pcs)
CD 09	100




CORROSION CLASS
C4

+

BRACKET

Item	B mm	Package (pcs)
CD 12	60	100
CD 14	120	100
CD 20	200	50
CD 25	250	50



CORROSION CLASS
C4

HANGER BRACKET

Item	Package (pcs)
CD 05	100
CD 05 C	100




CORROSION CLASS
C4

+

NONIUS COTTER


Item	Package (pcs)
DPK 607	100



CORROSION CLASS
C4

NONIUS BOTTOM PART


Item	Package (pcs)
CD 06	100
CD 06C	100



+

SPRING WITH WIRE

Item	Package (pcs)
RKV 100	100



+

NONIUS BOTTOM PART WITH SKREW HOLE


Item	Package (pcs)
CD 06N	100



+

HANGER BRACKET


Item	Package (pcs)
SAH 10	100



+

NONIUS BOTTOM PART WITH SPRING

Item	Package (pcs)
CD 06V	100



+


BUTTERFLY CLIP

Item	Package (pcs)
SH 50	100




NONIUS HANGER UPPER PART

Item	Length (mm)	Package (pcs)
JR 240	240	100
JR 340	340	100
JR 440	440	100
JR 540	540	100
JR 640	640	100
JR 740	740	100
JR 840	840	100
JR 940	940	100
JR 1340	1340	50
JR 1540	1540	50
JR 3000	3000	25




SUSPENSION WIRE WITH EYELET

Item	Length (mm)	Package (pcs)
RS 125	125	100
RS 250	250	100
RS 375	375	100
RS 500	500	100
RS 750	750	100
RS 1000	1000	100
RS 1200	1200	100
RS 1500	1500	100
RS 2000	2000	100
RS 2500	2500	100
RS 3000	3000	100




SUSPENSION WIRE WITH HOOK

Item	Length (mm)	Package (pcs)
RK 125	125	100
RK 250	250	100
RK 375	375	100
RK 500	500	100
RK 750	750	100
RK 1000	1000	100
RK 1200	1200	100



JÄIKRIPUTI

Item	Length (mm)	Package (pcs)
CD 170SR	170	100
CD 250SR	250	100



RESILIENT TAPE

Item	B (mm)	Length (mm)	Package (pcs)
T 3x30	30	30 000	40
T 3x45	45	30 000	10
T 3x50	50	30 000	24
T 3x70	70	30 000	17
T 3x95	95	30 000	12




SUPPORT PLATE

Item	H (mm)	B (mm)	Package (pcs)
TP cabinet	150	2500	1
TP sink	500	850	1
TP shower	400	1000	1

Material thickness: 1.0, 1.2 and 1.5 mm

Acoustic fasteners and fixings




ACOUSTIC BRACKET

Item	Length (mm)	Package (pcs)
CD 14 akust	120	100
CD 20 akust	200	100



ACOUSTIC WIRE

Item	Length (mm)	Package (pcs)
RS 375 akust	375	50
RS 500 akust	500	25
RS 750 akust	750	25
RS 1000 akust	1000	25




ACOUSTIC NONIUS HANGER UPPER PART

Item	Length (mm)	Package (pcs)
JR 640 akust	640	50
JR 940 akust	940	50



H-SHAPE

The downwards bent area of Profiline's H-shaped vertical profile's holes creates a rounded opening that can be used for electrical cables or pipes without damaging them or for fixing wool.



EXTENDABLE

Profiline's vertical profiles are easily extendable by installing two profile ends inside each-other and fixing in that position.

ROUGHENED

Profiline's profiles are roughened by rolling, which simplifies screw installation and makes sure that gypsum boards are fixed with good quality.



CENTRE-LINE

Profile's profiles have a rolled centre-line. The centre-line makes it easy to install the gypsum board's edge precisely to the centre of the profile.



HOLES FOR SCREWS

All Profiline runners that attach straight to the floor, ceiling or wall, have holes for screws at fixed intervals.



All Profiline products have been tested according to EU standards EN 14195:2014 and EN 13964:2014, and have the CE Marking.

Leden Estonia AS is the largest sheet metalworking company in Estonia. Under the Profiline brand, we manufacture and sell steel profiles and fasteners. We are focused on customer-oriented product development and quality. Profiline products have been developed in consideration of the requirements and habits of builders and they help save money and time.

Profiline's list of distributors is available at www.profiline.ee/en. Detailed installation instructions are available at the same site.



LEDEN

LEDEN ESTONIA AS

Loovälja tee 11, Liivamäe küla,
Jõelähtme vald 74210 Harjumaa

tel. +372 6349 250

info.ee@ledengroup.com

www.profiline.ee/en